




<mark>≕ TC Coil</mark>™



Model N6DNL8 shown with customer supplied rack system.



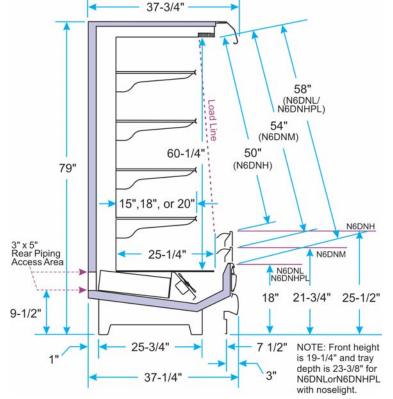

ALLOW 3" SPACE between the back of this case and the store wall, other cases or coolers to minimize possible condensation problems. FORCED VENTILATION may be necessary in some situations, Add 1 1/2" for Standard 4', 6', 8', or 12' Patch End 3 1/2 Case length Optional 3" 3" x 5" Rear piping 25 3/4 rear piping access area access area 2 1/2" Clearance Base legs Base 31" Refrigeration between bottom 1" PVC waste 37 3/4" of drain nine ę Electric Suction putlet pipe O.A. 3/8" Liquid -_and floor (Front of case) 22 2" 5" R or L

N6DN & N6DNHPL vertical multi-deck produce merchandisers have a narrow-depth footprint that offers potential space savings for your produce department where space is at a premium. These merchandisers can also be used to display dairy, deli, and beverage products.

High Performance TC Coil™

High Performance (HP) Merchandisers feature our patented TC Coil™ design, which represents a major technology breakthrough for the commercial refrigeration industry. Developed jointly by Carrier Corporation and Tyler, the TC Coil™ enables HP merchandisers to operate more efficiently, providing energy savings that allow faster payback periods for food retailers.

Note: For more information about Tyler high performance display merchandisers featuring TC Coil[™], go to the Technologies section of this catalog on page 8.

Features & Benefits

- Energy-efficient copper tube and aluminum fin coils.
- Double row of energy-efficient T8 canopy lights.
- Hinged light channel allows easy access to ballasts.
- Solid steel base adds strength and durability.
- Easily removable interior components for quicker cleaning.
- Fan assembly design allows access to coil and drain pan.
- Off-cycle defrost.

Options

- ECM fan motors for additional energy savings.
- Energy-efficient T8 nose light or T-8 shelf lighting (N6DN only) with remote ballasts for greater product illumination.
- Multiple depth shelving alternatives.
- 3 or 6 position shelf brackets for varied shelf display angles.
- Electric or gas defrost. (N6DN cases only)

Specifications are subject to engineering changes without notice.

Model	Case Length	Description	Capacity in Cubic Feet*
N6DNL	4' • 6' • 8' • 12'	18" Front, Narrow Multi-Deck Bulk Produce, standard coil	32.9 • 49.4 • 65.8 • 98.7
N6DNM	6' • 8' • 12'	22" Front, Narrow Multi-Deck Bull Produce, standard coil	49.4 • 65.8 • 98.7
N6DNH	6' • 8' • 12'	26" Front, Narrow Multi-Deck Bulk Produce, standard coil	49.4 • 65.8 • 98.7
N6DNHPL	4' • 6' • 8' • 12'	18" Front, Narrow Multi-Deck Bulk Produce, TC Coil	32.9 • 49.4 • 65.8 • 98.7

* Cubic capacity is based on four rows of 20" shelves.

Carrier

A United Technologies Company

66